


PI 耐高温胶带

PI HIGH TEMPERATURE RESISTANT TAPE

产品应用 Product Application

1. 高温遮蔽保护; High temperature masking protection;
2. 粉末喷涂; Powder spraying;
3. CNC制程; CNC manufacture procedure;
4. 绝缘绕包; Insulation wrapping;
5. 模切制程; Die cutting process.

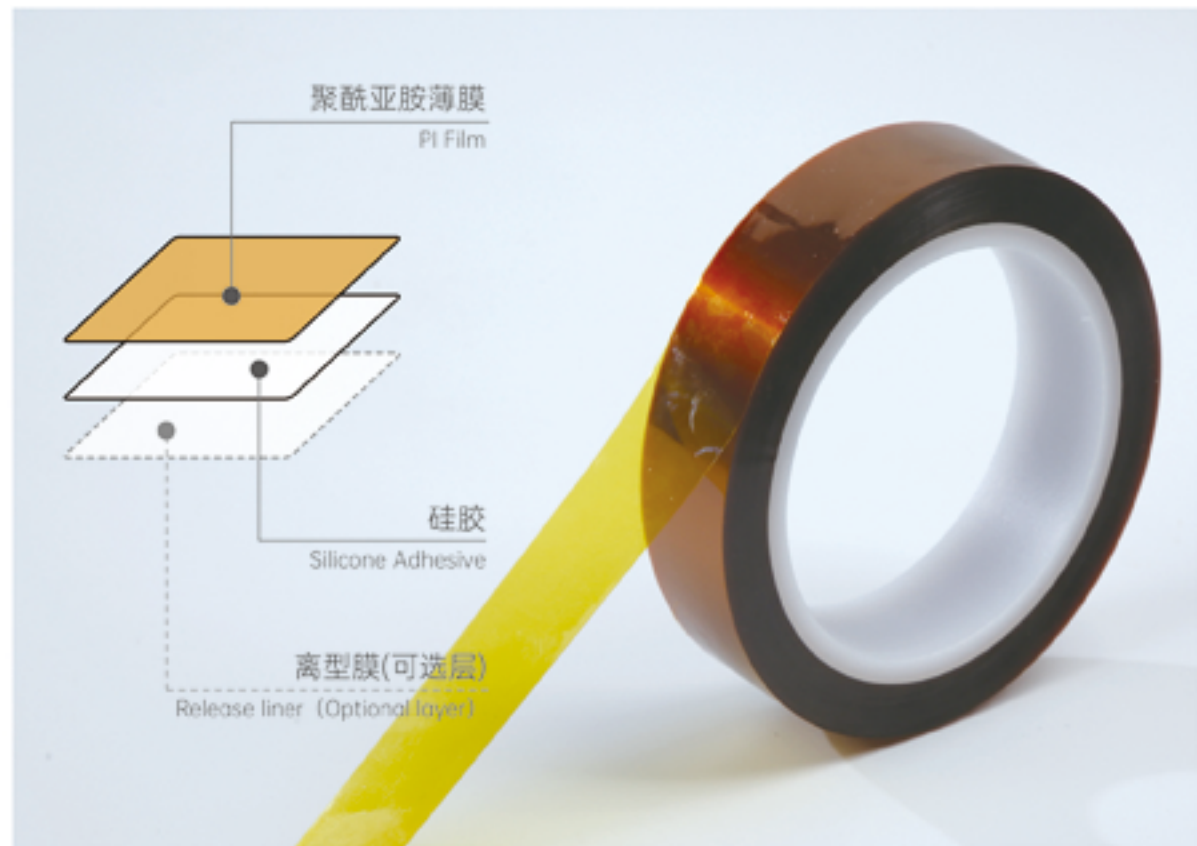


产品型号 PRODUCT MODEL	基材材质 BACKING MATERIAL	基材厚度(um) BACKING THICKNESS	胶厚(um) ADHESIVE THICKNESS	剥离力(g/25mm) PEEL STRENGTH	耐温(°C) TEMPERATURE RESISTANT
RI10	PI	20	5-30	100-500	280
RI20	PI	25	10-50	50-700	280
RI50	PI	50	10-60	200-900	280
RI70	PI	75	20-50	300-1000	280
RI125	PI	125	25-50	400-800	280

- 说明**
NOTE
1. 可复合离型膜 25-75um; Can be laminated with release liner, 25um- 75um;
 2. 出货规格: 500/1020mm × (33-500)M; Shipping specifications: 500/1020mm × (33-500) M;
 3. 以上为本公司常规产品, 其他要求可定制。
The above are our standard products. Other requirements can be customized.

透明耐高温胶带

TRANSPARENT HIGH TEMPERATURE RESISTANT TAPE

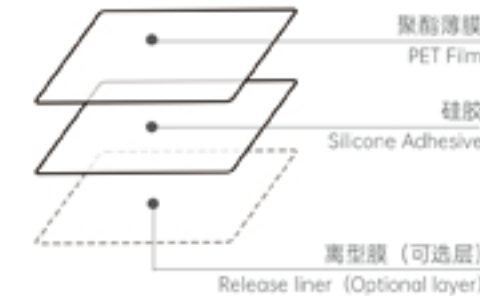


产品型号 PRODUCT MODEL	基材材质 BACKING MATERIAL	基材厚度(um) BACKING THICKNESS	胶厚(um) ADHESIVE THICKNESS	剥离力(g/25mm) PEEL STRENGTH	耐温(°C) TEMPERATURE RESISTANT
RB20	PET	25	8-80	100-1200	220
RB30	PET	38	8-80	100-1200	220
RB50	PET	50	10-70	200-1200	220
RB70	PET	75	10-50	200-1200	220
RB100	PET	100	10-60	200-1000	220
RB125	PET	125	10-60	200-1000	220
RB188	PET	188	10-60	200-1000	220

- 说明**
NOTE
1. 可复合离型膜 25-75um; Can be laminated with release liner, 25um- 75um;
 2. 出货规格: 500/1020/1070mm × (50-500)M; Shipping specifications: 500/1020/1070mm × (50-500) M;
 3. 可以定制。Can be customized.

间隔耐高温胶带

SPACER HIGH TEMPERATURE RESISTANT TAPE

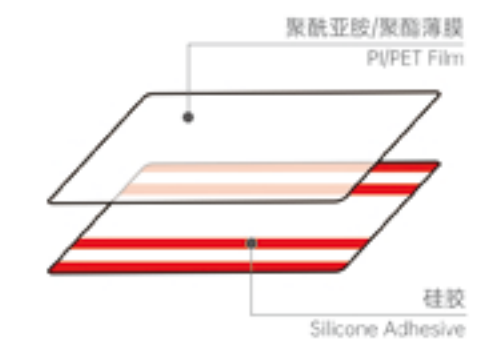


产品型号 PRODUCT MODEL	基材材质 BACKING MATERIAL	基材厚度(um) BACKING THICKNESS	胶厚(um) ADHESIVE THICKNESS	剥离力(g/25mm) PEEL STRENGTH	耐温(°C) TEMPERATURE RESISTANT
RB/RI-20J	PET/ PI	25	8-80	100-1200	220
RB/RI-30J	PET/ PI	38	8-80	100-1200	220
RB/RI-50J	PET/ PI	50	10-70	200-1200	220
RB/RI-70J	PET/ PI	75	10-50	200-1200	220

- 说明**
NOTE
1. 出货规格: 500mm × (33-200)M; Shipping specifications: 500/1020/1070mm × (50-500) M;
 2. 此类产品须依图纸进行定制化生产。Can be customized according to drawings.

有色胶耐高温胶带

COLORLED ADHESIVE HIGH TEMPERATURE RESISTANT TAPE

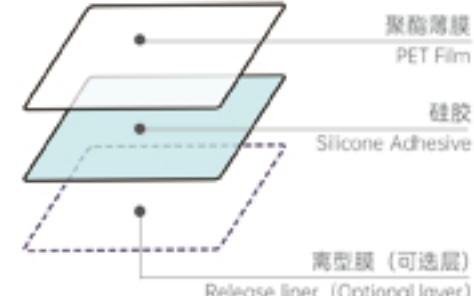


产品型号 PRODUCT MODEL	基材材质 BACKING MATERIAL	基材厚度(um) BACKING THICKNESS	胶厚(um) ADHESIVE THICKNESS	剥离力(g/25mm) PEEL STRENGTH	耐温(°C) TEMPERATURE RESISTANT
RB20	PET	25	8-80	100-1200	220
RB30	PET	38	8-80	100-1200	220
RB50	PET	50	10-70	200-1200	220
RB70	PET	75	10-50	200-1200	220
RB100	PET	100	10-60	200-1000	220
RB125	PET	125	10-60	200-1000	220
RB188	PET	188	10-60	200-1000	220

- 说明**
NOTE
1. 可复合离型膜 25-75um; Can be laminated with release liner, 25um- 75um;
 2. 常规颜色: 红、黄、蓝、绿; Standard colors: Red, Yellow, Blue, Green;
 3. 出货规格: 500/1020/1070mm × (50-500)M; Shipping specifications: 500/1020/1070mm × (50-500) M;
 4. 可以定制。Can be customized.

有色膜耐高温胶带

COLORLED FILM HIGH TEMPERATURE RESISTANT TAPE

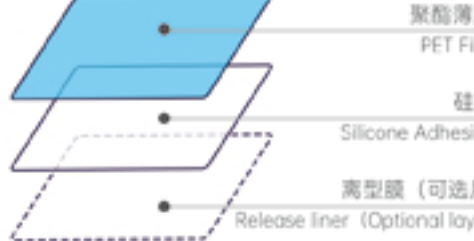

产品型号 PRODUCT MODEL	基材材质 BACKING MATERIAL	基材厚度(um) BACKING THICKNESS	胶厚(um) ADHESIVE THICKNESS	剥离力(g/25mm) PEEL STRENGTH	耐温(°C) TEMPERATURE RESISTANT
RB20	PET	25	8-80	100-1200	220
RB30	PET	38	8-80	100-1200	220
RB50	PET	50	10-70	200-1200	220
RB70	PET	75	10-50	200-1200	220


- 说明**
NOTE
1. 可复合离型膜 25-75um; Can be laminated with release liner, 25um- 75um;
 2. 常规颜色: 黑、白、黄、蓝; Standard colors: Black, White, Yellow, Blue;
 3. 出货规格: 500/1020/1070mm × (50-500)M; Shipping specifications: 500/1020/1070mm × (50-500) M;
 4. 可以定制。Can be customized.

双面耐高温胶带

DOUBLE-SIDE HIGH TEMPERATURE RESISTANT TAPE

产品应用 Product Application

1. 高温遮蔽保护; High temperature masking protection;
2. 粉末喷涂; Powder spraying;
3. CNC制程; CNC manufacture procedure;
4. 绝缘绕包; Insulation wrapping;
5. 模切制程; Die cutting process.

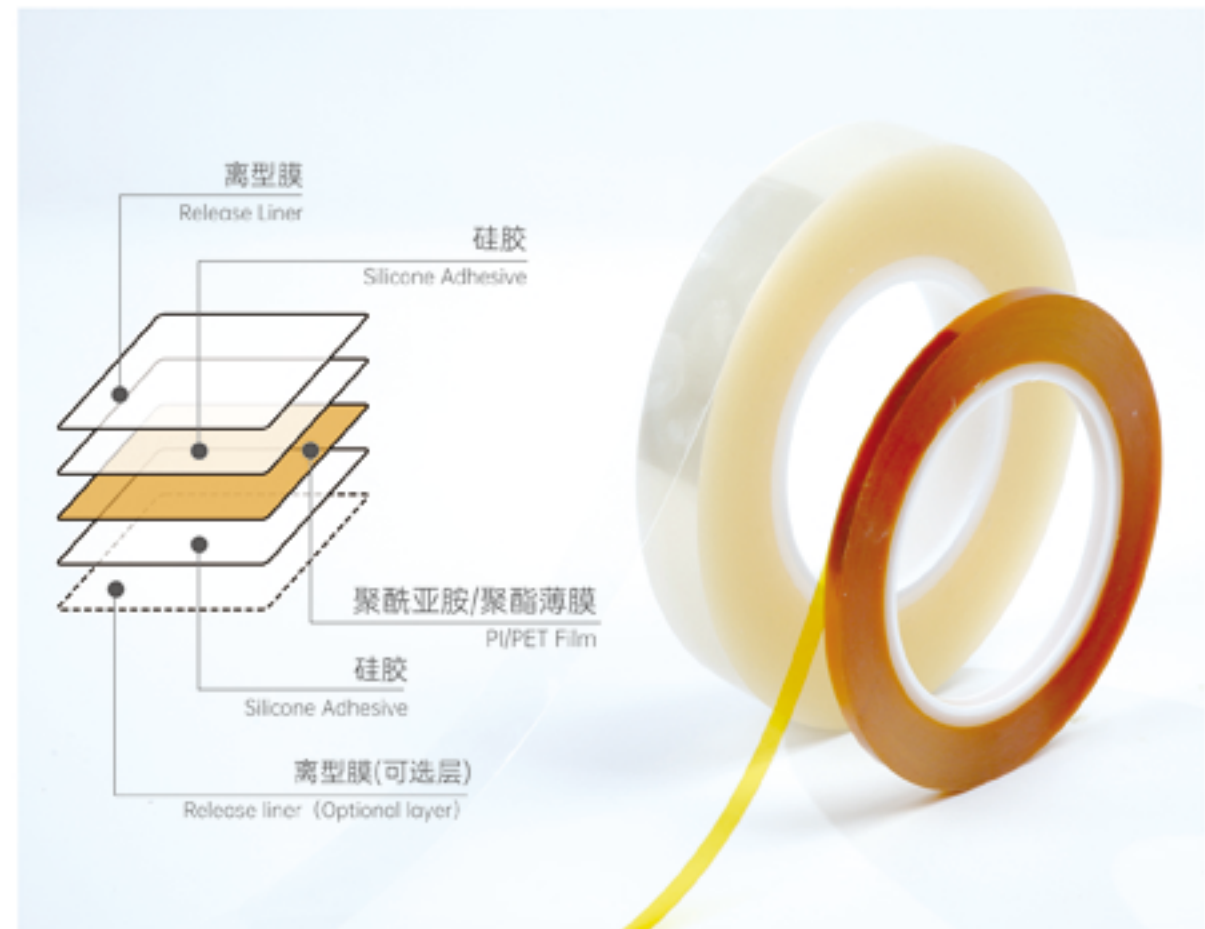

产品型号 PRODUCT MODEL	基材材质 BACKING MATERIAL	基材厚度(um) BACKING THICKNESS	胶厚(um) ADHESIVE THICKNESS	剥离力(g/25mm) PEEL STRENGTH	耐温(°C) TEMPERATURE RESISTANT
RI201S	PI	25	35+40	1000±200	280
RI202S	PI	25	37+37	1000±200	280
RB201S	PET	28	30+30	1000±200	220

- 说明**
NOTE
1. 可复合离型膜 25-75um; Can be laminated with release liner, 25um- 75um;
 2. 出货规格: 500 mm × (33-100)M; Shipping specifications: 500mm × (33-100) M;
 3. 以上为本公司常规产品, 其他要求可定制。
The above are our standard products. Other requirements can be customized.